

Kent Academic Repository

Full text document (pdf)

Citation for published version

Garcia Zuazola, Ignacio Julio and Batchelor, John C. and Elmirghani, J.M.H. and Gomes, Nathan J. (2010) UWB PIFA Antenna for Simplified Transceivers. IET Electronics Letters, 46 (2). pp. 116-118. ISSN 0013-5194.

DOI

<https://doi.org/10.1049/el/2010.2410>

Link to record in KAR

<http://kar.kent.ac.uk/24928/>

Document Version

Author's Accepted Manuscript

Copyright & reuse

Content in the Kent Academic Repository is made available for research purposes. Unless otherwise stated all content is protected by copyright and in the absence of an open licence (eg Creative Commons), permissions for further reuse of content should be sought from the publisher, author or other copyright holder.

Versions of research

The version in the Kent Academic Repository may differ from the final published version.

Users are advised to check <http://kar.kent.ac.uk> for the status of the paper. **Users should always cite the published version of record.**

Enquiries

For any further enquiries regarding the licence status of this document, please contact:

researchsupport@kent.ac.uk

If you believe this document infringes copyright then please contact the KAR admin team with the take-down information provided at <http://kar.kent.ac.uk/contact.html>

UWB PIFA for simplified transceivers

I.J. Garcia Zuazola, J.C. Batchelor, J.M.H. Elmirghani and N.J. Gomes

This paper is a postprint of a paper submitted to and accepted for publication in IET Microwaves, Antennas and Propagation and is subject to Institution of Engineering and Technology Copyright. The copy of record is available at IET Digital Library

UWB PIFA for simplified transceivers

I.J. Garcia Zuazola, J.C. Batchelor, J.M.H. Elmirghani and N.J. Gomes

Abstract- A planar inverted-F antenna (PIFA) with an input match designed to offer the capability of a front-end bandpass filter in mobile communication transceivers is presented. The proposed antenna is low cost, easily fabricated, and operates in the unlicensed lower band (3.168– 4.752 GHz) of the ultra-wideband (UWB) communication standard with a 3.57:1 VSWR. It is demonstrated that the antenna possesses a radiation pattern with good front-to-back ratio and shows acceptable impedance matching in proximity to large ground planes making it suitable for applications such as in-vehicle communications.

Introduction: Planar inverted-F antennas (PIFAs) are well suited for integration with portable wireless equipment and hidden in-car wireless systems. Ultra-wideband (UWB) technology is of global interest in modern communication systems owing to its potential to deliver high data rates with multipath immunity at low power and low cost [1]. The deployment of UWB inside vehicles can provide mobility and connectivity to a host of passenger devices while significantly reducing the costs associated with wiring. Vehicle chasses typically contain large steel plates and antennas over ground planes are favoured for ceiling mounts [2].

A novel UWB PIFA incorporating two shorting posts with coupling gaps is presented in this Letter. The antenna operates at the lower UWB band (3.168–4.752 GHz) with a 3.57:1 VSWR and has a tailored impedance bandwidth and roll-off comparable to a standard front-end bandpass filter (BPF). To bring down unit cost, there has been a drive to simplify the hardware of UWB systems [3], and hardware could be further reduced by the adoption of the UWB PIFA proposed here, because the commonly deployed front-end BPFs would not be required. Additionally, the elimination of the BPF with its associated insertion loss could offer power savings from the battery.

Antenna design structure: Fig. 1 depicts the geometry of the UWB PIFA antenna. It consists of two planes, an etched upper layer (A) and a bottom ground (B) separated by an air substrate ($\epsilon_r \sim 1$). The A and B planes are capacitively coupled via the two pairs of pins (a and a' and b and b') as shown in Fig. 1. The dimensions of both posts a and b are $2.9 \times 2.9 \times 2.9 \text{ mm}^3$ while posts a' and b' are $2.9 \times 2.9 \times 1.45 \text{ mm}^3$. Coupling between planes A and B is achieved across the gaps in the posts. The antenna is fed at the upper plane A using the inner core (0.51 mm) of a 50 V rigid coax cable with a total diameter of 2.16 mm and 62 mm length. The outer shield of the cable is attached to a grounding strip, D, electrically connected to B. The total volume of the antenna is $19.58 \times 15.75 \times 5.53 \text{ mm}^3$. The maximum dimension is smaller than 0.21 λ at the lowest frequency of operation.

UWB PIFA operation: The concept of etching slots in monopole UWB antennas to produce band notches has previously been reported, e.g. [4]. This Letter reports a similar technique applied to a PIFA to obtain a bandpass filter characteristic. To illustrate the effect of the design modifications made here, comparison is made between the newly proposed antenna and a similar reference PIFA not containing the

capacitively coupled posts (a and b). In a simulated parametric variation study using Zeland IE3D, the capacitive gap size d was varied in steps of 0.2 mm. The results are given in Table 1. Decreasing d tended to improve the band-notch depth and impedance roll-off. An optimum length value of $a = b = 2.9$ mm and, $a' = b' = 1.45$ mm was found to give a band-notch at 5.5 GHz, a return loss (RL) of 25 dB, roll-off of 0.18 and 0.03 dB/MHz and a 25 dB S_{11} fractional bandwidth of 40%. The optimal value of d corresponds to 1.18 mm. The reflection coefficient of the proposed antenna is shown in Fig. 2 compared to a standard front-end BPF [5]. The commercially available BPF has a passband rejection of 2441 MHz with an S_{21} of approximately 2 dB. The proposed antenna shows a 3.168–4.860 GHz bandwidth and a frequency roll-off of 0.024 and 0.030 dB/MHz for the lower and upper bands, respectively. Compared to the commercially available BPF, the proposed antenna has a lower 1108 MHz passband rejection and improves the roll-offs to 0.024 and 0.030 dB/MHz as opposed to 0.050 and 0.031 dB/MHz which were measured for the BPF. If the bandpass filter and its associated mismatch loss of 2 dB were removed, then the return loss of the antenna can be relaxed from 10 to 5 dB and there will still be an overall reduction in loss of 0.8 dB. The measured 5 dB return loss bandwidth of the proposed PIFA is 42.15% for the 3.168–4.860 GHz FCC ultra-wideband (UWB).

Table 1: Results

Frequency (GHz)	Bandwidth (%)	Lower roll-off (dB/MHz)	Upper roll-offs (dB/MHz)
Reference PIFA	29.88	0.068	0.027
Reference PIFA with single post (a)	28.75	0.068	0.028
Reference PIFA with double post (a + b)	40.17	0.178	0.028
Parametric 1 ($d = 5.28$ mm)	56.31	0.054	0.022
Parametric 2 ($d = 4.08$ mm)	55.48	0.062	0.021
Parametric 3 ($d = 3.08$ mm)	56.25	0.058	0.021
Parametric 4 ($d = 2.28$ mm)	54.99	0.061	0.023
Parametric 5 ($d = 1.68$ mm)	52.80	0.015	0.028
Parametric 6 ($d = 1.28$ mm)	51.23	0.068	0.029
Parametric 7 ($d = 1.18$ mm)	40.17	0.178	0.028

Compared to the reference PIFA, Table 1, the new antenna has similar roll-offs and an improved BW of 951 MHz for RELSP 25 dB return loss bandwidth. The final band-notch is improved by 4.48 dB at 5.5 GHz. Therefore, adjusting the gap capacitance of the electrically unconnected shorting posts allows a BPF-like characteristic to be defined.

To investigate the effect of attaching the antenna to a large conducting plate in a car chassis, a larger ground plane (E) of dimensions $510 \times 800 \times 0.75$ mm³ was placed a quarter wavelength below the PIFA. Fig. 2 shows the S_{11} curve for the proposed PIFA over the large plane E and little effect can be seen compared to the UWB PIFA without the extra ground. This makes the antenna suitable for in-vehicle applications where large ground planes may be present. Selected measured far-field radiation patterns in polar form are depicted in Fig. 3 for the PIFA and for the PIFA mounted on the large ground plane, E. The patterns are essentially directional, presenting a 1208 half power beam-width and 1.33/1 front-to-back ratio in the H-azimuth plane and similar value for the E-elevation. When the large plane E was added, the beam-width and the front-to-back ratio are, respectively, 1208 and 1.53/1. The measured

gains of 7.11 and 2.35 dBi were obtained with and without the E plane present. Antenna efficiency including input match and radiation efficiency were simulated to be 80 and 95%, respectively.

Conclusion: A novel compact, efficient, directional UWB PIFA with a bandpass filter characteristic is presented. The antenna potentially eliminates the need for the front-end filter devices within transceivers leading to a more compact system.

Acknowledgment: This work was partially funded by the European Union FP7-ICT-215533 FUTON.

References

- 1 Elmirghani, J.M.H., Badic, B., Li, Y., Liu, R., Mehmood, R., Wang, C., Xing, W., Garcia Zuazola, I.J., and Jones, S.: 'IRIS: an intelligent radio fibre telematics system'. Proc. 13th ITS World Congress and Exhibition in London, October 2006, London, UK
- 2 Garcia Zuazola, I.J., Elmirghani, J.M.H., and Batchelor, J.C.: 'High-speed ultra-wide band in-car wireless channel measurements', IET Commun., 2009, 3, (7), pp. 1115–1123
- 3 Mohammad, N.H., and Ismail, W.: 'System-level integration and simulation of ultra wideband receiver front-end'. Mosharaka Int. Conf. Communications, Propagation and Electronics, (MIC-CPE), March 2008, pp. 1–6
- 4 Lee, W.-S., Lim, W.-G., and Yu, J.-W.: 'Multiple band-notched planar monopole antenna for multiband wireless systems', IEEE Microw. Wirel. Compon. Lett., 2005, 15, (9)
- 5 www.rflambda.com

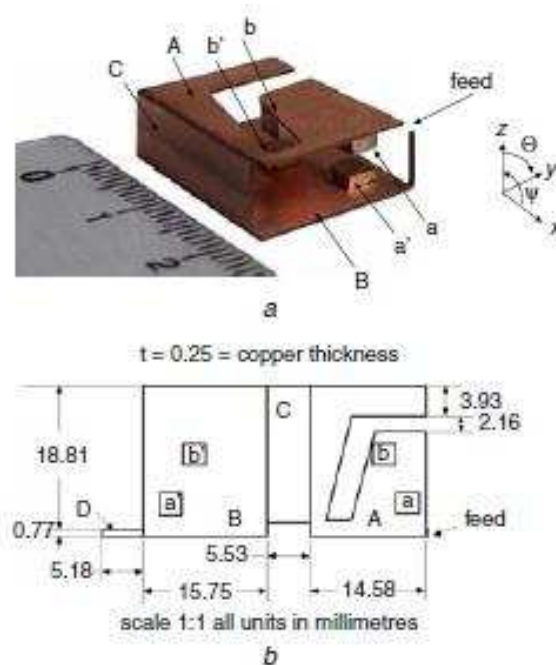


Fig. 1 Geometry of proposed PIFA

a Isometrical view

b Unfolded planar view of conductors

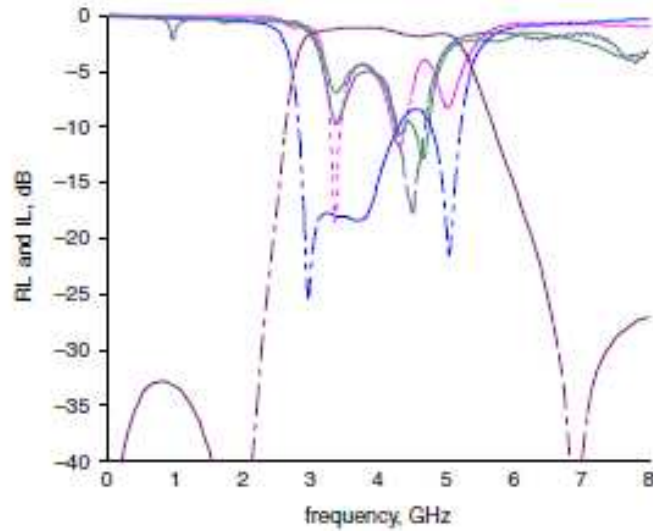


Fig. 2 PIFA and BPF comparison

- - - - simulated reflection coefficient (S11) PIFA
- measured reflection coefficient (S11) PIFA
- · - - measured reflection coefficient (S11) PIFA with E plane
- · - - measured reflection coefficient (S11) BPF
- - - - measured insertion coefficient (S21) BPF

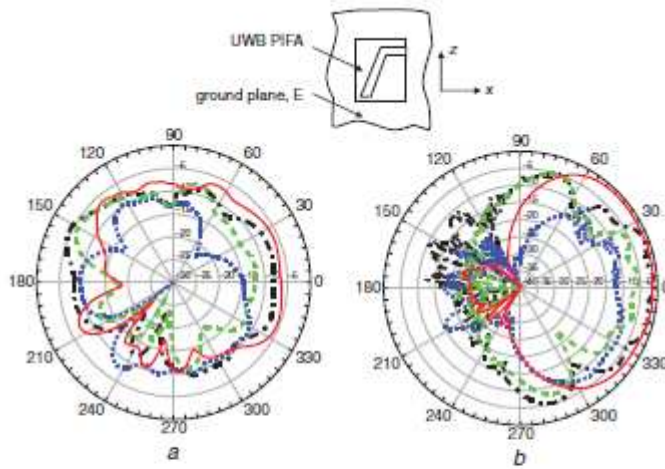


Fig. 3 Radiation patterns

a Proposed PIFA

b PIFA with large ground plane E

- co-polarisation, azimuth, y - z plane 4.752 GHz
- - - co-polarisation, elevation, x - z plane 4.752 GHz
- cross-polarisation, azimuth, y - z plane 4.752 GHz
- · - cross-polarisation, elevation, x - z plane 4.752 GHz