



# Kent Academic Repository

**Sanz-Izquierdo, Benito and Batchelor, John C. (2008) *A Dual Band Belt Antenna*. In: International Workshop on Antenna Technology, 4-6 March, 2008, Chiba, Japan.**

## Downloaded from

<https://kar.kent.ac.uk/13302/> The University of Kent's Academic Repository KAR

## The version of record is available from

## This document version

Author's Accepted Manuscript

## DOI for this version

## Licence for this version

UNSPECIFIED

## Additional information

Winner of Poster Prize

## Versions of research works

### Versions of Record

If this version is the version of record, it is the same as the published version available on the publisher's web site. Cite as the published version.

### Author Accepted Manuscripts

If this document is identified as the Author Accepted Manuscript it is the version after peer review but before type setting, copy editing or publisher branding. Cite as Surname, Initial. (Year) 'Title of article'. To be published in *Title of Journal*, Volume and issue numbers [peer-reviewed accepted version]. Available at: DOI or URL (Accessed: date).

## Enquiries

If you have questions about this document contact [ResearchSupport@kent.ac.uk](mailto:ResearchSupport@kent.ac.uk). Please include the URL of the record in KAR. If you believe that your, or a third party's rights have been compromised through this document please see our [Take Down policy](https://www.kent.ac.uk/guides/kar-the-kent-academic-repository#policies) (available from <https://www.kent.ac.uk/guides/kar-the-kent-academic-repository#policies>).

# A Dual Band Belt Antenna

B. Sanz-Izquierdo and J.C. Batchelor  
*b.sanz@kent.ac.uk, j.c.batchelor@kent.ac.uk*  
Department of Electronics, University of Kent  
UK, CT2 7NT

## 1. Introduction

This paper presents an antenna structure design using a standard belt for wearable applications. The antenna arose from a body of research work on wearable metallic structures functioning as antennas for wireless on-body networks.

Antennas have been developed for wearable applications mainly in the form of printed metal patches [1,2] using the textile material as dielectric substrate. More recently, the authors of the present manuscript have proposed the use of metallic button structures for the development of antennas for wearable applications [3-7]. Metallic button antennas have been designed to operate at the 2.4GHz and 5GHz WLAN bands in [3-6] and for UWB applications in [7]. These metallic button structures are able to operate on an on-body environment and present radiation patterns of multiband and wide band monopole antennas on a small ground plane.

This paper follows a similar research trend in the study of wearable metallic structures suitable for wireless on-body communications. In particular, a standard metallic belt buckle is employed to create an antenna embedded in a belt which is able to operate at the 2.4 GHz and 5GHz WLAN bands. The main advantage of belts over buttons is that belts are truly removable, and are able to carry computers or other electronics devices within them. In addition, the antenna structure on the belt buckle can be used either as a small wrist belt band or in the strap of a backpack or handbag. Antenna arraying and diversity could also be applied in the case of the two straps of a backpack.

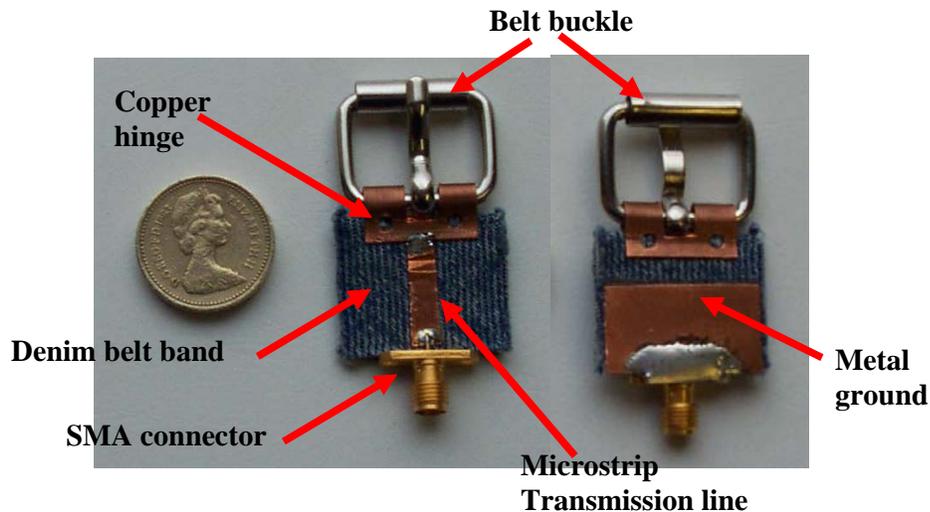


Fig.1. Photos of the belt antenna. Left: Front view; right: back view.

## 2. Antenna Design and Fabrication

The initial belt antenna consists of a standard metallic belt buckle, a denim band with the ground plane and a microstrip transmission line. The belt buckle is joined to the denim through a purposely made copper hinge which folds around one side of the buckle and clamps to the denim material on the other side. The copper hinge adds rigidity to the antenna and ensures electrical connection to the

belt. A buckle of dimensions 25x20mm has been used as the radiating element of a first antenna design with total dimensions 25x45mm. An already characterized denim material of relative permittivity 1.4 was used as the main substrate for the belt, though other materials such as leather could also be employed. The antenna was fed by a microstrip transmission line which is connected to the 50ohm SMA connector on one side and to the radiating element on the other side. The ground plane of the antenna was calculated for optimum performance and placed on the other side of the textile substrate. The main dimensions of the antenna are shown in Fig.2 and Table 1.

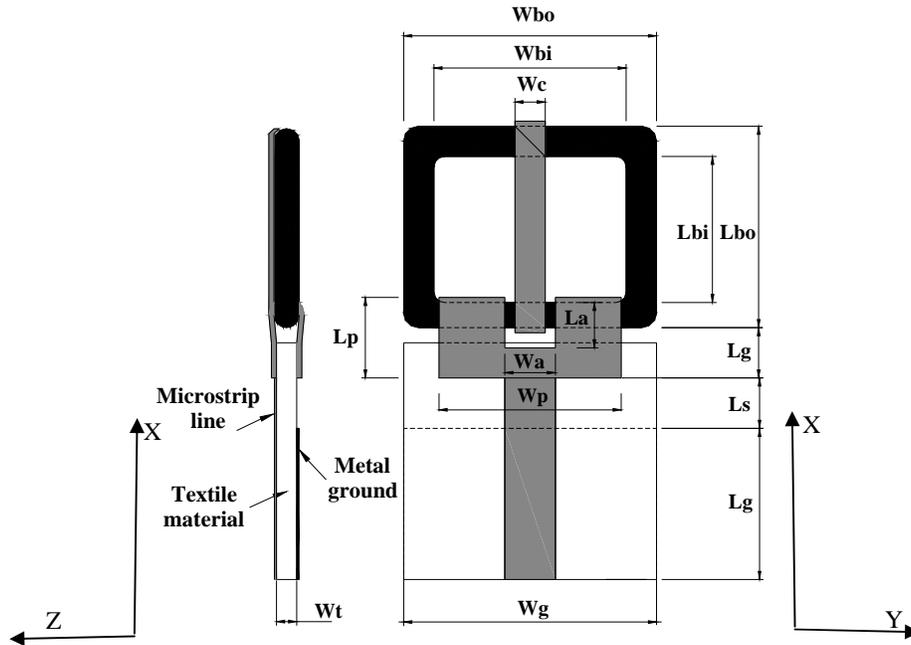


Fig.,2. Belt antenna dimensions

TABLE I. Main dimensions of the belt antenna

Wg	Lg	Ls	Wp	Lp	Wa	La
25.0	16.0	5.0	18.0	8.0	5.0	5.0
Wt	Wc	Lbo	Wbo	Lbi	Wbi	
1.5	3.0	20.0	25.0	14.0	19.0	

### 3. Results

The calculated and measured reflection coefficient curves ( $S_{11}$ ) for the belt antenna are given in Fig.3 which shows two bands of operation coinciding with Bluetooth/WLAN and IEEE 802.11 standards.

The measured -10dB bandwidth of the antenna on air were 22.8% and 9.4% at the 2.4GHz band 5.25 GHz band respectively. CST Microwave Studio<sup>TM</sup> was used for the simulation of the belt antenna, which predicted well the dual frequency, wide band, operation.

The measured radiation patterns at 2.45 GHz and 5.25 GHz for the XY, YZ and XZ planes of the belt antenna are shown in Fig.4. The measured radiation patterns of the antenna are those of a planar monopole with small ground plane. The predicted gain was 2.8dBi at 2.45GHz and 4.5dBi at 5.25GHz. The measured gain did not fall below 1dBi across the band.

The design of the ground plane dimensions and the distance of the belt buckle of the antenna to the ground are critical to achieving the mutiband and broadband characteristics of the antenna.

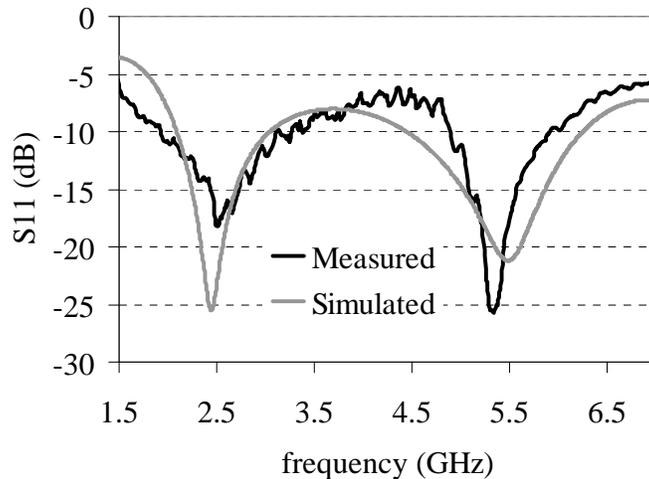


Fig.3. Reflection coefficient for the belt antenna

## 4. Conclusions

A novel wearable antenna for wireless communications is presented in this paper. This paper has discussed the possibility of employing a belt buckle as an antenna, bringing benefits such as removability and the ability to hand portable wireless devices from the belt itself. The antenna consists of a belt buckle, hinge, denim waist band and electrical connections. The antenna was fed by a microstrip transmission line on the denim substrate with the antenna placed on the other side of the textile band. The prototype achieves wide band, dual frequency operation and is able to cover the 2.45GHz and 5.25 GHz bands necessary for Bluetooth/WLAN and IEEE 802.11 standards.

## Acknowledgments

The authors would like to thank Nigel Simpson and Clive Birch for helping in the fabrication and measurement of the antennas.

## References

- [1] Salonen, P., Kim, J., and Rahmat-Samii, Y.: "Dual-Band E-Shaped Patch Wearable Textile Antenna", *IEEE Proc. AP-S, Washington DC, 2005*.
- [2] Ouyang, Y., Karayianni, E. and Chappell, W.J.: "Effect of Fabric Patterns on Electrotile Patch Antennas", *IEEE Proc. AP-S, Washington DC, 2005*.
- [3] B.Sanz-Izquierdo, F. Huang and J.C. Batchelor, "Dual Band Button Antennas for Wearable Applications", *IWAT2006, White Plains, New York, March 6-8*.
- [4] B. Sanz-Izquierdo, F. Huang. and Batchelor, J.C. "Covert Dual Band Wearable Button Antenna", *IET Electronics Letters, Vol.42, No.12, pp. 668-670, June 8, 2006*.
- [5] B.Sanz-Izquierdo, F. Huang, J.C.Batchelor "Wearable Dual Band Button Antennas", *Loughborough Antennas & Propagation Conference (LAPC), Loughborough April 2006, pp. 33-35*.
- [6] B.Sanz-Izquierdo, M.I.Sobhy, J.C.Batchelor "Small Size Wearable Button Antenna", *European Conference on Antennas and Propagation EuCAP06, Nice, France, p. 39, 2006 November*.

[7] B.Sanz-Izquierdo, M.I.Sobhy, J.C.Batchelor "UWB Wearable Button Antenna", European Conference on Antennas and Propagation EuCAP06, Nice, France, p. 131, 2006 November.

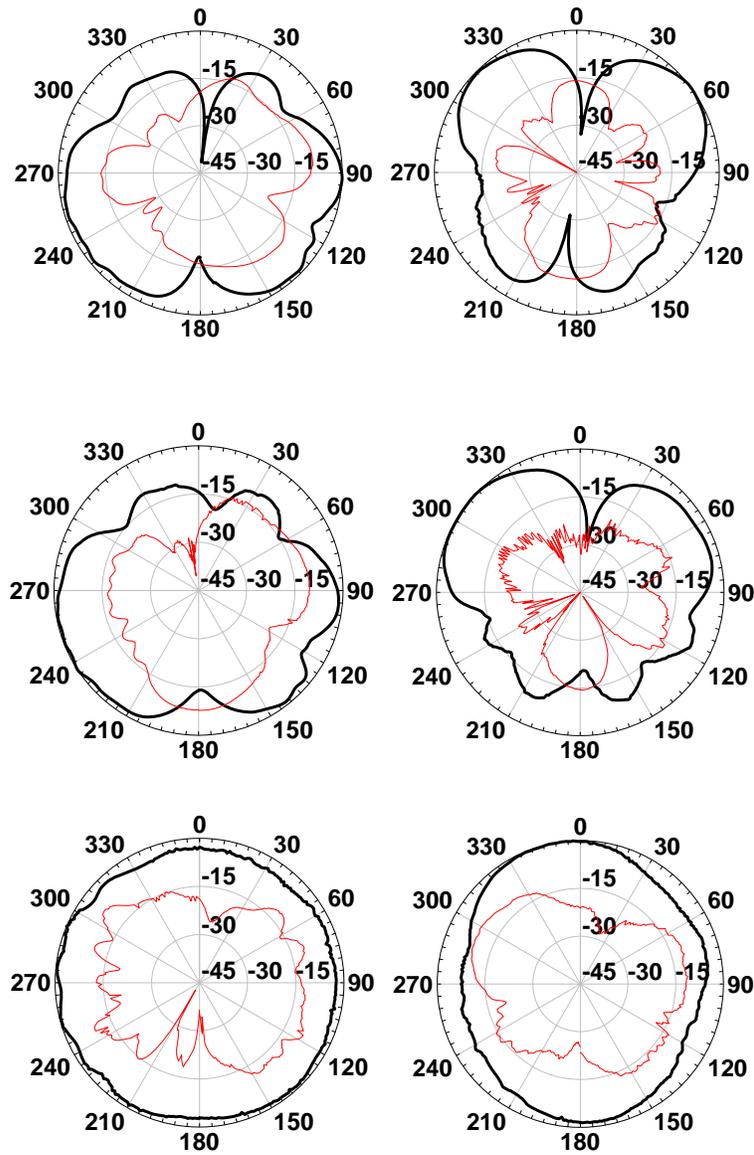


Fig.4. Measured radiation patterns at 2.45 GHz (left column) and 5.25 GHz (right column) of the belt antenna in air. XY plane (top row), XZ plane (middle row), YZ plane (bottom row).

# IEEE COPYRIGHT FORM

To ensure uniformity of treatment among all contributors, other forms may not be substituted for this form, nor may any wording of the form be changed. This form is intended for original material submitted to the IEEE and must accompany any such material in order to be published by the IEEE. Please read the form carefully and keep a copy for your files.

**TITLE OF PAPER/ARTICLE/REPORT/PRESENTATION/SPEECH (hereinafter, "the Work"):**

A Dual Band Belt Antenna

**COMPLETE LIST OF AUTHORS:** B. Sanz-Izquierdo and J.C. Batchelor

**IEEE PUBLICATION TITLE (Journal, Magazine, Conference, Book):** IEEE International Workshop and Antenna Technology, (IWAT08)

1.

## 2. COPYRIGHT TRANSFER

The undersigned hereby assigns to the Institute of Electrical and Electronics Engineers, Incorporated (the "IEEE") all rights under copyright that may exist in and to the above Work, and any revised or expanded derivative works submitted to the IEEE by the undersigned based on the Work. The undersigned hereby warrants that the Work is original and that he/she is the author of the Work; to the extent the Work incorporates text passages, figures, data or other material from the works of others, the undersigned has obtained any necessary permissions. **See reverse side for Retained Rights and other Terms and Conditions.**

### Author Responsibilities

The IEEE distributes its technical publications throughout the world and wants to ensure that the material submitted to its publications is properly available to the readership of those publications. Authors must ensure that their Work meets the requirements as stated in section 8.2.1 of the IEEE PSPB Operations Manual, including provisions covering originality, authorship, author responsibilities and author misconduct. More information on IEEE's publishing policies may be found at <http://www.ieee.org/web/publications/pubtoolsandpolicyinfo/index.html>. Authors are advised especially of IEEE PSPB Operations Manual section 8.2.1.B12: "It is the responsibility of the authors, not the IEEE, to determine whether disclosure of their material requires the prior consent of other parties and, if so, to obtain it." Authors are also advised of IEEE PSPB Operations Manual section 8.1.1B: "Statements and opinions given in work published by the IEEE are the expression of the authors."

## 3. GENERAL TERMS

- The undersigned represents that he/she has the power and authority to make and execute this assignment.
- The undersigned agrees to indemnify and hold harmless the IEEE from any damage or expense that may arise in the event of a breach of any of the warranties set forth above.
- In the event the above work is not accepted and published by the IEEE or is withdrawn by the author(s) before acceptance by the IEEE, the foregoing copyright transfer shall become null and void and all materials embodying the Work submitted to the IEEE will be destroyed.
- For jointly authored Works, all joint authors should sign, or one of the authors should sign as authorized agent for the others.

(1) John Batchelor

21/10/07

Author/Authorized Agent for Joint Authors

Date

### U.S. Government Employee Certification (where applicable)

This will certify that all authors of the Work are U.S. government employees and prepared the Work on a subject within the scope of their official duties. As such, the Work is not subject to U.S. copyright protection.

(2) \_\_\_\_\_

\_\_\_\_\_  
**Authorized Signature**

**Date**

(Authors who are U.S. government employees should also sign signature line (1) above to enable the IEEE to claim and protect its copyright in international jurisdictions.)

**Crown Copyright Certification (where applicable)**

This will certify that all authors of the Work are employees of the British or British Commonwealth Government and prepared the Work in connection with their official duties. As such, the Work is subject to Crown Copyright and is not assigned to the IEEE as set forth in the first sentence of the Copyright Transfer Section above. The undersigned acknowledges, however, that the IEEE has the right to publish, distribute and reprint the Work in all forms and media.

(3) \_\_\_\_\_

\_\_\_\_\_  
**Authorized Signature**

**Date**

(Authors who are British or British Commonwealth Government employees should also sign line (1) above to indicate their acceptance of all terms other than the copyright transfer.)

rev. 070307

**IEEE COPYRIGHT FORM *(continued)***

**RETAINED RIGHTS/TERMS AND CONDITIONS**

1. Authors/employers retain all proprietary rights in any process, procedure, or article of manufacture described in the Work.
2. Authors/employers may reproduce or authorize others to reproduce the Work, material extracted verbatim from the Work, or derivative works for the author's personal use or for company use, provided that the source and the IEEE copyright notice are indicated, the copies are not used in any way that implies IEEE endorsement of a product or service of any employer, and the copies themselves are not offered for sale.
3. Authors/employers may make limited distribution of all or portions of the Work prior to publication if they inform the IEEE in advance of the nature and extent of such limited distribution.
4. In the case of a Work performed under a U.S. Government contract or grant, the IEEE recognizes that the U.S. Government has royalty-free permission to reproduce all or portions of the Work, and to authorize others to do so, for official U.S. Government purposes only, if the contract/grant so requires.
5. For all uses not covered by items 2, 3, and 4, authors/employers must request permission from the IEEE Intellectual Property Rights office to reproduce or authorize the reproduction of the Work or material extracted verbatim from the Work, including figures and tables.
6. Although authors are permitted to re-use all or portions of the Work in other works, this does not include granting third-party requests for reprinting, republishing, or other types of re-use. The IEEE Intellectual Property Rights office must handle all such third-party requests.

**INFORMATION FOR AUTHORS**

**IEEE Copyright Ownership**

It is the formal policy of the IEEE to own the copyrights to all copyrightable material in its technical publications and to the individual contributions contained therein, in order to protect the interests of the IEEE, its authors and their employers, and, at the same time, to facilitate the appropriate re-use of this material by others. The IEEE distributes its technical publications throughout the world and does so by various means such as hard copy, microfiche, microfilm, and electronic media. It also abstracts and may translate its publications, and articles contained therein, for inclusion in various compendiums, collective works, databases and similar publications.

**Author/Employer Rights**

If you are employed and prepared the Work on a subject within the scope of your employment, the copyright in the Work belongs to your employer as a work-for-hire. In that case, the IEEE assumes that when you sign this Form, you are authorized to do so by your employer and that your employer has consented to the transfer of copyright, to the representation and warranty of publication rights, and to all other terms and conditions of this Form. If such authorization and consent has not been given to you, an authorized representative of your employer should sign this Form as the Author.

**Reprint/Republication Policy**

The IEEE requires that the consent of the first-named author and employer be sought as a condition to granting reprint or republication rights to others or for permitting use of a Work for promotion or marketing purposes.

**PLEASE DIRECT ALL QUESTIONS ABOUT THIS FORM TO:  
Manager, IEEE Intellectual Property Rights Office, 445 Hoes Lane, Piscataway, NJ 08855-1331.  
Telephone +1 (732) 562-3966**