

Kent Academic Repository

Full text document (pdf)

Citation for published version

Gomes, Nathan J. and Shen, Pengbo and James, Jeanne and Nkansah, Anthony and Liang, Xing (2010) Indoor Pico-Cellular Network Operation based on a Simple Optical Millimetre-Wave Generation Scheme. In: Proc. Access Networks and In-House Communications (ANIC) Conference, OSA Optics and Photonics Congress, Karlsruhe, Germany.

DOI

Link to record in KAR

<https://kar.kent.ac.uk/24920/>

Document Version

UNSPECIFIED

Copyright & reuse

Content in the Kent Academic Repository is made available for research purposes. Unless otherwise stated all content is protected by copyright and in the absence of an open licence (eg Creative Commons), permissions for further reuse of content should be sought from the publisher, author or other copyright holder.

Versions of research

The version in the Kent Academic Repository may differ from the final published version.

Users are advised to check <http://kar.kent.ac.uk> for the status of the paper. **Users should always cite the published version of record.**

Enquiries

For any further enquiries regarding the licence status of this document, please contact:

researchsupport@kent.ac.uk

If you believe this document infringes copyright then please contact the KAR admin team with the take-down information provided at <http://kar.kent.ac.uk/contact.html>

Indoor Pico-cellular Network Operation Based on a Simple Optical Millimeter-wave Generation Scheme

Nathan J. Gomes, Pengbo Shen, Jeanne James, Anthony Nkansah, Xing Liang
Broadband and Wireless Communications Group, University of Kent, Canterbury, Kent, CT2 7NT, UK
N.J.Gomes@kent.ac.uk

Abstract: Experimental demonstrations of modulated signal transmission and pico-cellular network operation at millimeter-wave frequencies, which are based on a simple technique for millimeter-wave generation using an optical phase modulator and optical filtering, are reviewed.

©2010 Optical Society of America

OCIS codes: 060.2330 Fiber optics communications, 060.5625 Radio frequency photonics

1. Introduction

Radio over fiber has been proposed for the support of pico-cellular millimeter-wave frequency systems as it can simplify the numerous remote antenna units required in such systems [1]. To minimize the effects of fiber dispersion, it is necessary to use optical single sideband (OSSB) or optical double sideband with carrier suppression (ODSB-CS) generation and transport for the millimeter-wave signals [1]. In these schemes, the millimeter-wave signal at the photoreceiver can be seen as resulting from the heterodyne detection of two optical components, such that dispersion causes only phase changes to the millimeter-wave signal but no fading, as results from the beating of multiple components. In this paper, we review a simple scheme for the generation of millimeter-wave modulated optical signals, data transmission using such a scheme over optical (radio over fiber) and wireless paths, and the demonstration of “live” wireless network operation.

2. Phase modulation and optical sideband selection

As a millimeter-wave generation technique, we have proposed the use of an optical phase modulator [2]. Mach Zehnder intensity modulators biased at their null or transmission points have also been proposed for frequency doubling and quadrupling (respectively) in the generation of the millimeter-wave signal. In the case of the former, no optical filtering is necessary, although this may become desirable for higher modulation depths. With an optical phase modulator, optical filtering is necessary. The major advantage over intensity modulators is that the device operation is bias independent; intensity modulators require strict bias control.

The fundamental purpose of the optical filter in a millimeter-wave generation scheme using an optical phase modulator is removal of the carrier or one sideband [2]. By using an optical notch filter to remove the carrier, and a bandpass optical filter to remove higher order sidebands, millimeter-wave signals over a wide and continuous frequency range can be generated [3]. Fig. 1 shows the setup for wideband millimeter wave generation over a frequency range from 75 to 140 GHz, and the results are shown in Fig.2 [3].

3. Picocellular wireless network performance

As, shown in Fig.3, for data transmission, the phase modulator and optical filtering millimeter-wave generation scheme is followed by a lower bandwidth intensity modulator to which is applied the modulated data at an intermediate frequency [4]. The wireless transmission in this case was at 25 GHz, due to the availability of RF components, although previous work had examined transmission at 60 GHz [5]. Both single carrier quadrature phase shift keying (QPSK) and quadrature amplitude modulation (QAM) signals and orthogonal frequency division multiplexing (OFDM) signals were used. System operation with the required error vector magnitude (EVM) has been demonstrated over most of our 90m² laboratory, even at 30 MSps (up to 180 Mbps) [4]. This operation was achieved with no system adjustment, demonstrating a dynamic range wide enough to allow for simple remote antenna units (with no gain control). Also, the operation was with the RAU antenna purposely placed in the corner of the room to observe the limitations, instead of the center of the room. Separate experiments have confirmed that by using multiple IF signals to modulate the MZM, separate subcarrier multiplexed channels can be transported [5].

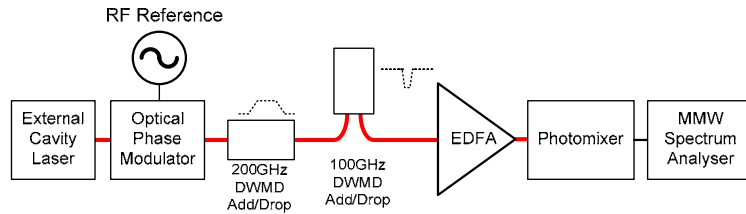


Fig.1 Setup for continuously tunable optical millimeter-wave generation. EDFA: Erbium Doped Fiber Amplifier.

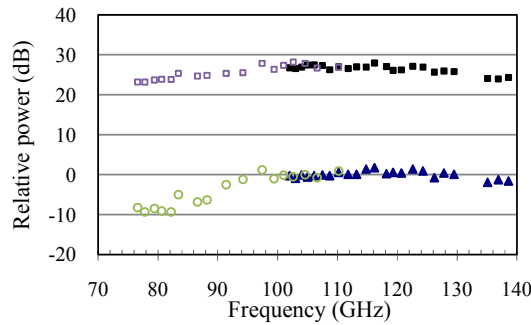


Fig. 2 Relative power of the generated millimeter-wave signal after calibration for the photomixer response.

- W-band photomixer, with EDFA; ■ F-band photomixer, with EDFA
- W-band photomixer, without EDFA; ▲ F-band photomixer, without EDFA

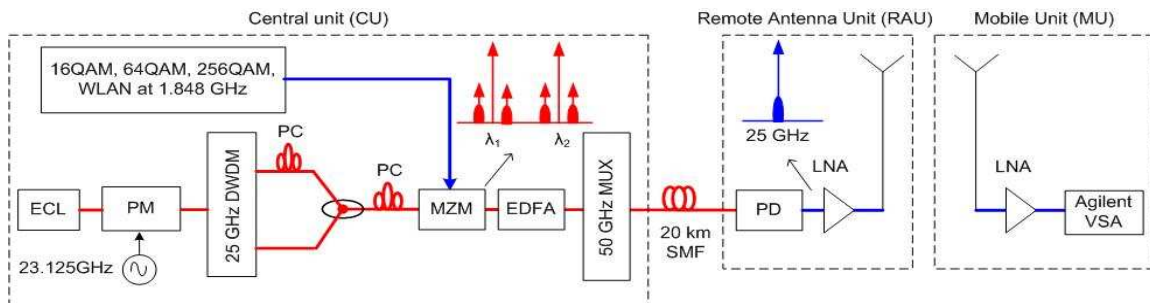


Fig. 3 Radio over fiber and wireless transmission experimental setup. ECL: External cavity laser, PM: Phase Modulator, PC: Polarization Controller, MZM: Mach Zehnder Modulator, EDFA: Erbium doped Fiber Amplifier, PD: Photodiode, LNA: Low Noise Amplifier

“Live” wireless LAN demonstration has been carried out by applying the signal from a wireless LAN access point to the MZM in the downlink [7]. A wireless transceiver located at the laptop provided for reception at 25 GHz and re-transmission at 2.4 GHz, to enable the laptop to receive the signals. In this case the uplink operated directly using the standard wireless LAN transmissions at 2.4 GHz. Again, operation throughout our 90m² laboratory was demonstrated with the RAU antenna placed in the corner of the room, with very little throughput degradation [6].

4. References

- [1] e.g., see A. Kim et al., “60 GHz wireless communication systems with radio over fiber links for indoor wireless LANs,” *IEEE Trans. Consumer. Electron.*, 50, pp. 517–520, May 2004
- [2] P. Shen et al., “High-purity millimetre-wave photonic local oscillator generation and delivery,” *Int. Topical Mtg. Microwave Photonics*, pp.189-192, 2003
- [3] P. Shen et al., “Low Cost, Continuously Tunable, Millimeter-wave Photonic LO Generation using Optical Phase Modulation and DWDM Filters,” *IEEE Photon. Technol. Lett.*, 20, pp.1986-1988, Dec. 2008
- [4] J. James et al., “Full Downlink Transmission of Multilevel QAM Signals over Mm-wave over Fiber System using Phase Modulator and DWDM Filtering,” *Asia-Pacific Microwave Photonics Conference*, April 2009
- [5] P. Shen et al. “Multilevel Modulated Signal Transmission for Millimeter-Wave Radio over Fiber System” *Int. Topical Mtg. Microwave Photonics*, Oct. 2008
- [6] J. James et al., “Optical mm-wave up-conversion of closely separated channels using optical phase modulator”, *6th ISIS workshop*, Stockholm, Sweden, June 2008.
- [7] J. James et al., “Millimeter-wave wireless local area network over multimode fiber system demonstration”, to appear in *IEEE Photon. Technol. Lett.*, 2010