

# Kent Academic Repository

## Full text document (pdf)

### Citation for published version

Wang, Guoqing and Habib, Usman and Wang, Chao and Gomes, Nathan J. and Yan, Zhijun and Zhang, Lin (2017) Wavelength-controlled beam steering for optical wireless transmission using an in-fiber diffraction grating. In: 2017 Conference on Lasers and Electro-Optics, 14-19 May 2017, San Jose, CA, USA.

### DOI

[https://doi.org/10.1364/CLEO\\_SI.2017.SF1L.5](https://doi.org/10.1364/CLEO_SI.2017.SF1L.5)

### Link to record in KAR

<http://kar.kent.ac.uk/60751/>

### Document Version

Author's Accepted Manuscript

#### Copyright & reuse

Content in the Kent Academic Repository is made available for research purposes. Unless otherwise stated all content is protected by copyright and in the absence of an open licence (eg Creative Commons), permissions for further reuse of content should be sought from the publisher, author or other copyright holder.

#### Versions of research

The version in the Kent Academic Repository may differ from the final published version.

Users are advised to check <http://kar.kent.ac.uk> for the status of the paper. **Users should always cite the published version of record.**

#### Enquiries

For any further enquiries regarding the licence status of this document, please contact:

[researchsupport@kent.ac.uk](mailto:researchsupport@kent.ac.uk)

If you believe this document infringes copyright then please contact the KAR admin team with the take-down information provided at <http://kar.kent.ac.uk/contact.html>

# Wavelength-Controlled Beam Steering for Optical Wireless Transmission Using an In-Fiber Diffraction Grating

Guoqing Wang<sup>1</sup>, Usman Habib<sup>1</sup>, Chao Wang<sup>1\*</sup>, Nathan J Gomes<sup>1</sup>, Zhijun Yan<sup>2,3</sup>, Lin Zhang<sup>3</sup>

<sup>1</sup>Communications Group, School of Engineering and Digital Arts, University of Kent, Canterbury, United Kingdom CT2 7NT

<sup>2</sup>School of Optical and Electronic Information (SOEI), Next Generation Internet Access National Engineering Laboratory (NGIAS),

Huazhong University of Science and Technology, Wuhan, 430074, China

<sup>3</sup>Aston Institute of Photonic Technologies, Aston University, Birmingham, United Kingdom B4 7ET

\*Author e-mail address: C.Wang@kent.ac.uk

**Abstract:** Passive beam steering for optical wireless transmission based on wavelength tuning using a novel in-fiber diffraction grating featuring compactness, high diffraction efficiency and inherent fiber-compatibility, is proposed and experimentally demonstrated for the first time.

**OCIS codes:** (050.1950) Diffraction gratings; (060.3735) Fiber Bragg gratings; (060.2605) Free-space optical communication

## 1. Introduction

Free-space indoor optical wireless transmission using near-infrared (NIR) laser beams provides multi-gigabits per second of data rate with the advantages of unlicensed spectrum, ultra-wide bandwidth, being physically secure as light waves do not penetrate walls, no electromagnetic interference, and low power consumption.

The capability of steering laser beams is crucial for high-speed optical wireless links to provide large coverage area, track mobile users, and avoid obstructions. Recently, wavelength-tuning based passive optical beam steering has become a promising solution for high data-rate in-door optical wireless communications [1]. Different types of passive diffractive optical devices have been used to steer optical beams by diverging different wavelengths into different spatial positions, such as diffraction gratings [2], and polymer polarization gratings [3]. However, these free-space diffractive devices share drawbacks such as high coupling loss between free space and fiber links, limited diffraction efficiency (up to 75%), bulky configuration and high cost. In this work, we report the first experimental demonstration using a 45° tilted fiber grating (TFG) [4] as a highly efficient, low cost and compact in-fiber diffractive device for passive optical beam steering in indoor optical wireless transmission. In a proof-of-concept experiment, free-space transmission over 1.4 m serving two users with data rate of 9.6 Gb/s per beam has been demonstrated using 2.4 GHz bandwidth signals.

## 2. Experiment and results

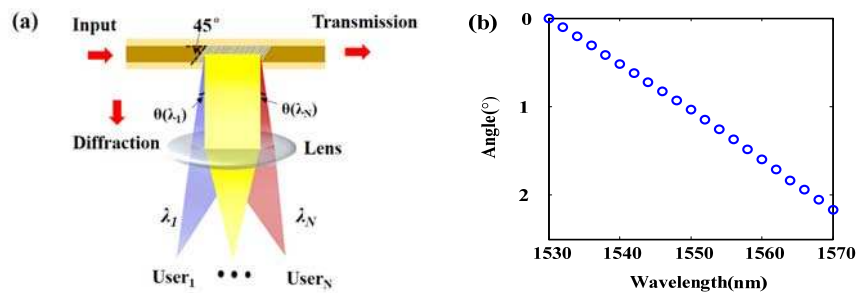


Fig. 1. (a) The structure of a 45° TFG and its application for passive beam steering; (b) Angular dispersion of the 45° TFG across a wavelength range between 1530 and 1570 nm.

The structure of a 45° TFG and the concept of using the TFG as an in-fiber diffraction grating for passive beam steering is shown in Fig. 1(a). The measured beam divergence angle from the 45° TFG due to wavelength tuning from 1530 to 1570 nm is shown in Fig. 1(b). The angular dispersion of the TFG is 0.054°/nm without optical magnification. Due to strong tilted reflection, the TFG offers an enhanced diffraction efficiency as high as 93.5%.

Fig.2 depicts the experimental setup of the beam steering system for indoor optical wireless transmission using the 45° TFG as an in-fiber diffraction grating. A 2.4 GHz bandwidth orthogonal frequency-division multiplexing (OFDM) 16-quadrature amplitude modulation (16 QAM) encoded data stream at 9.6 Gb/s is generated on a 2 GHz radio carrier using an arbitrary waveform generator (AWG, Tektronix 7122C) with a sampling rate of 12 GS/s. This radio signal is amplified and modulated on an optical carrier using a Mach-Zehnder modulator (MZM), which is biased at quadrature point. The modulated and amplified optical carrier is then diffracted into free space via the 45° TFG with appropriate polarization control to ensure the maximum diffraction efficiency [4]. Beam steering for

different users is achieved by simply tuning the wavelength of the optical carrier, and a lens set is used to control the beam size. Two wavelengths of 1530 and 1550 nm are used to steer the laser beam to serve two users that are 0.2 m apart. After a free-space transmission of 1.4 m, light is received using a fiber collimator and detected by a 3 GHz photo-detector (PD) at each user. The recovered radio signal is captured by a 50 GS/s real-time oscilloscope, and the data is decoded and analyzed via off-line digital data processing.

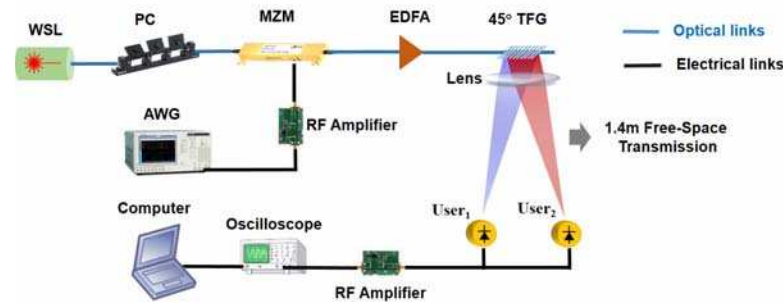


Fig. 2. Schematic of the beam steering system for free space indoor optical wireless transmission using a 45° TFG. AWG: arbitrary waveform generator; RF: radio frequency; MZM: Mach-Zehnder modulator; WSL: wavelength swept laser; PC: polarization controller; EDFA: Erbium doped fiber amplifier; 45° TFG: 45° tilted fiber grating.

Performance of two beam-steered optical wireless channels is evaluated. When the received optical power is -4 dBm, the constellation of the decoded OFDM 16 QAM data for channel 1 (1550 nm) is shown in Fig. 3(a). The error vector magnitude (EVM) is estimated as 9.6%. Fig. 3(b) represents EVM performance for both channels with respect to received optical power. The EVM limit for 16 QAM is 12.5%, as shown by the red line. With a bandwidth of 2.4GHz, our system demonstrates an aggregate data rate of 9.6 Gb/s per beam, limited by the sampling rate of the AWG used. It could be easily improved using a higher sampling rate.

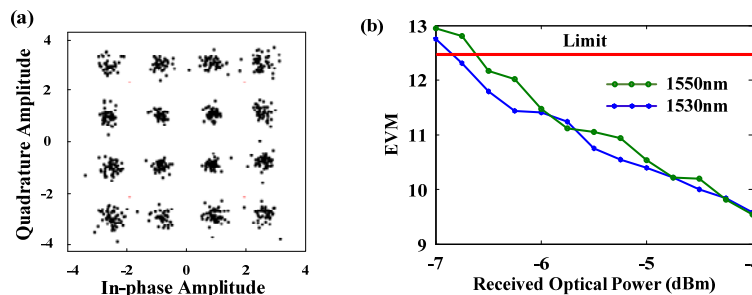


Fig. 3. (a) Constellation of the decoded OFDM 16-QAM signal for one channel (1550 nm) with received optical power of -4 dBm. (b) EVM performance for both channels with respect to received optical power.

### 3. Summary

We presented the first experimental demonstration of the use of a 45° TFG as an in-fiber diffraction grating for passive beam steering in optical wireless transmission links. Compared to conventional free-space diffractive devices, the TFG provides significant advantages of high diffraction efficiency, compactness, low cost and inherent fiber-compatibility. As a proof-of-the-concept, 1.4 m free-space transmission distance with data rate of 9.6 Gb/s per beam serving two users was demonstrated.

### 4. Acknowledgement

Usman Habib acknowledges the funding by the EU's H2020 RAPID project (grant agreement No 643297).

### 5. References

- [1] C. W. Oh, Z. Cao, E. Tangdiongga, T. Koonen, "Free-space transmission with passive 2D beam steering for multi-gigabit-per-second per-beam indoor optical wireless networks," *Opt. Express*, **40**, 19211-19227 (2016).
- [2] T. Chan, E. Myslivets, and J. E. Ford, "2-Dimensional beamsteering using dispersive deflectors and wavelength tuning," *Opt. Express* **16**, 14617-14628 (2008).
- [3] J. Kim, M. N. Miskiewicz, S. Serati, M. J. Escuti, "Nonmechanical laser beam steering based on polymer polarization gratings: design optimization and demonstration," *J. Lightwave Technol.* **33**, 2068-2077 (2015).
- [4] G. Wang, C. Wang, Z. Yan, L. Zhang, "Highly efficient spectrally encoded imaging using a 45° tilted fiber grating," *Opt. Lett.* **41**, 2398-2401 (2016).