



Kent Academic Repository

Kaya, Rukiye, Salhi, Said and Spiegler, Virginia (2022) *Correction to: A novel integration of MCDM methods and Bayesian networks: the case of incomplete expert knowledge*. *Annals of Operations Research*, 332 (1-3). pp. 1169-1170. ISSN 0254-5330.

Downloaded from

<https://kar.kent.ac.uk/105153/> The University of Kent's Academic Repository KAR

The version of record is available from

<https://doi.org/10.1007/s10479-022-05050-2>

This document version

Publisher pdf

DOI for this version

Licence for this version

CC BY (Attribution)

Additional information

Versions of research works

Versions of Record

If this version is the version of record, it is the same as the published version available on the publisher's web site. Cite as the published version.

Author Accepted Manuscripts

If this document is identified as the Author Accepted Manuscript it is the version after peer review but before type setting, copy editing or publisher branding. Cite as Surname, Initial. (Year) 'Title of article'. To be published in **Title of Journal**, Volume and issue numbers [peer-reviewed accepted version]. Available at: DOI or URL (Accessed: date).

Enquiries

If you have questions about this document contact ResearchSupport@kent.ac.uk. Please include the URL of the record in KAR. If you believe that your, or a third party's rights have been compromised through this document please see our [Take Down policy](https://www.kent.ac.uk/guides/kar-the-kent-academic-repository#policies) (available from <https://www.kent.ac.uk/guides/kar-the-kent-academic-repository#policies>).



Correction to: A novel integration of MCDM methods and Bayesian networks: the case of incomplete expert knowledge

Rukiye Kaya^{1,2} · Said Salhi¹ · Virginia Spiegler¹

Published online: 14 November 2022
© The Author(s) 2022

Correction to: Annals of Operations Research
<https://doi.org/10.1007/s10479-022-04996-7>

Figure 9 was incorrectly published and has been replaced by the original one supplied.
Original article has been corrected.

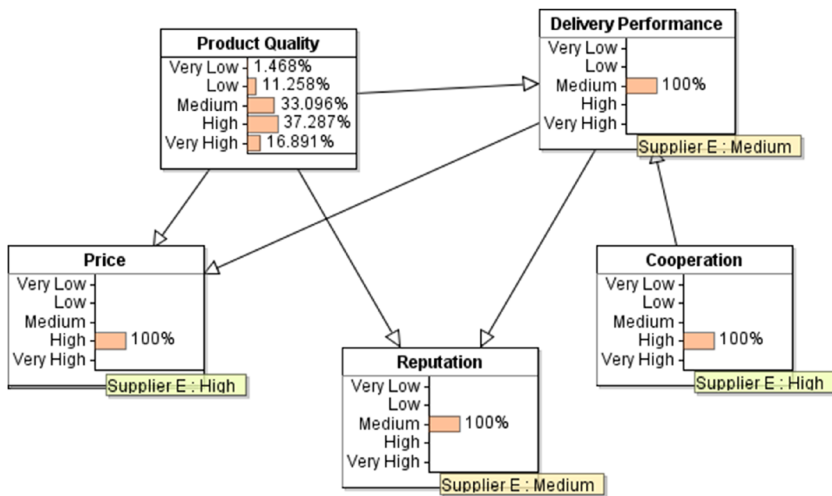


Fig. 9 Example BN with ranked nodes for supplier E

The original article can be found online at <https://doi.org/10.1007/s10479-022-04996-7>.

✉ Rukiye Kaya
rk398@kent.ac.uk

¹ Centre for Logistics and Heuristic Optimisation, Kent Business School, The University of Kent, Canterbury, Kent CT2 7FS, UK

² Department of Industrial Engineering, Abdullah Gül University, Kayseri, Turkey

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.