

Kent Academic Repository

Full text document (pdf)

Citation for published version

Lu, Gang (2018) Burner Condition Monitoring based on Flame Imaging and Data Fusion Techniques.
In: 12th ECCRIA - The European Conference on Fuel and Energy Research and its Applications.
TFERF- The Fuel and Energy Research Forum (Unpublished)

DOI

Link to record in KAR

<https://kar.kent.ac.uk/69032/>

Document Version

Supplemental Material

Copyright & reuse

Content in the Kent Academic Repository is made available for research purposes. Unless otherwise stated all content is protected by copyright and in the absence of an open licence (eg Creative Commons), permissions for further reuse of content should be sought from the publisher, author or other copyright holder.

Versions of research

The version in the Kent Academic Repository may differ from the final published version.

Users are advised to check <http://kar.kent.ac.uk> for the status of the paper. **Users should always cite the published version of record.**

Enquiries

For any further enquiries regarding the licence status of this document, please contact:

researchsupport@kent.ac.uk

If you believe this document infringes copyright then please contact the KAR admin team with the take-down information provided at <http://kar.kent.ac.uk/contact.html>

Burner Condition Monitoring based on Flame Imaging and Data Fusion Techniques

*M. M. Hossain¹, J. Cugley¹, G. Lu¹, S. Caesar², S. Cornwell², G. Riley², Y. Yan¹

¹ School of Engineering and Digital Arts, University of Kent, Canterbury, Kent CT2 7NT, UK

² RJM International, Parchment St, Winchester SO23 8AT, UK

Rapid growth in electricity generation from intermittent renewables has resulted in increasing demand in conventional fossil-fuel power stations for plant flexibility, load balancing and fuel flexibility. This has led to new challenges in plant monitoring and control, particularly securing combustion stability for optimizing combustion process in terms of furnace safety, fuel efficiency and pollutant emissions. An unstable combustion process can cause many problems including furnace vibration, non-uniform thermal distribution in the furnace, high pollutant emissions and unburnt carbon in the flue gas. The stability of burners should therefore be continuously monitored and maintained for the improved overall performance of the furnace. A study is carried out to investigate the burner stability based on flame imaging and data fusion techniques. Experiments were carried out on a 915 MW_{th} coal-fired power station. A bespoke flame imaging system (Fig. 1) was employed to acquire flame images from 16 individual burners (4 mills each with 4 burners) with a frame rate up to 200 frames per second. The characteristic parameters of the flame, including temperature, non-uniformity, entropy, oscillation frequency and colour characteristics (hue, saturation and intensity), are computed. The relationship between the flame characteristics and burner inputs and flue gas emissions (e.g., NO_x) is quantified. Stability index is then introduced as an indicator of the stability of individual burner. Fig. 2 illustrates typical flame images for different burners. Detailed test results and analysis will be presented at the conference.

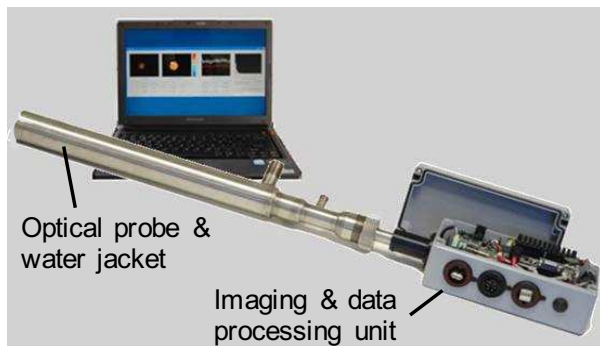


Fig. 1 Overview of the flame imaging system

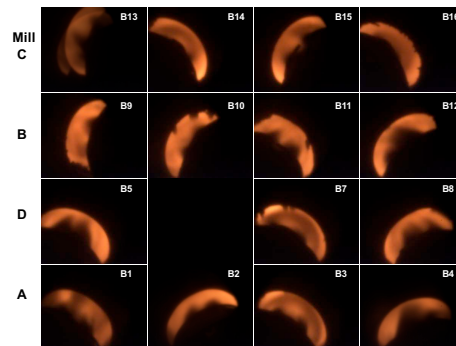


Fig. 2 Flame images of 16 burners

Keywords: coal-fired boiler, flame, burner condition, combustion stability, digital imaging, image processing.

Acknowledgement: The authors wish to acknowledge Innovate UK for providing a grant (Project No: 132206) in aid of this research.

* Corresponding author: e-mail: m.hossain@kent.ac.uk